


## Multi-port DC to DC Power Supply Unit

The TESCO PSU multi-port DC to DC power supply unit provides the required +12VDC and +5VDC for the L3000e® and other peripheral equipment.

It has been designed with an integrated battery backup system which engages, should the +24V primary power source fall 1.2V below the battery backup voltage input; a bumpless transfer to the battery backup voltage is initiated. If the primary voltage input rises to 1.2V greater than the battery backup voltage, a bumpless transfer back to the primary power input is performed.

### Features

- » Integrated battery backup with bumpless transfer
- » Pull-apart terminal blocks
- » Spare fuse

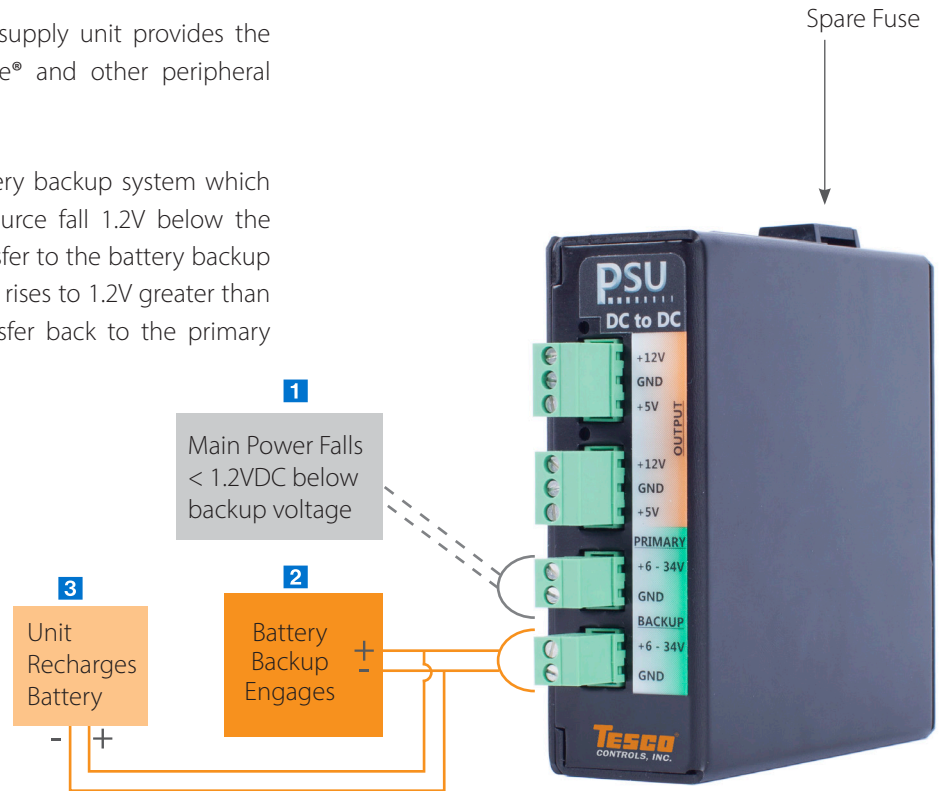

## Specifications

### L3000 PSU POWER SUPPLY UNIT

2 Inputs	Primary and backup
2 Outputs	Each output provides the required +12VDC and +5VDC
Input Voltage	6VDC to 34VDC
Primary>Backup	1.2V (to prevent L3000e from running on the backup battery)
Efficiency:	>95%
Operating Temp	150°F
+12V Total Amperage	4A
+5V Total Amperage	5A
Mount:	DIN Rail
Dimensions	H 4.45" x D 4.25" x W 1.5"

### Corporate Headquarters

8440 Florin Road  
Sacramento, CA 95828  
(916) 395-8800

### Regional Offices

42015 Remington Ave. Suite 102  
Temecula, CA 92590  
(951) 308-6450

1315-B Dayton St.  
Salinas, CA 93901  
(831) 754-6838

213 Sage St.  
Carson City, NV 89706  
(800) 94-TESCO

10699 Airline Hwy. Suite B  
Baton Rouge, LA 70816  
(800) 94-TESCO