



- » Built to UL 508A standards
- » May be rated at 400 amp, 600 amp or 800 amp
- » Rated for 120 to 480 volts
- » Vandal proof doors with hasp, stress rated to 2,000 lbs
- » Self-contained
- » Factory wired and tested before shipment

Features

- » Low Profile
- » No exposed fasteners
- » Aluminum
- » Durable all welded construction
- » UL approved copper cable bussing and control wiring
- » Circuit breakers cable-in cable-out type
- » Factory wired and tested before shipment
- » Built to UL 508A Standards
- » Vandal-resistant doors with hasp, stress rated to 2,000 lbs

TESCOFLEX[®] low-profile, single-meter, high amperage underground service distribution pedestals are used for a wide variety of municipal applications. The 28-600 Single Meter TESCOFLEX[®] low-profile pedestal provides power distribution and metering rated to 480 volts; single phase or three phase applications; 2 or 3 pole main breakers; and may be rated at 400 amp, 600 amp or 800 amp.

TESCOFLEX[®] pedestals are constructed of the highest grade of materials using hot-dipped galvanized steel, stainless steel, or aluminum. Our coatings will withstand the most stringent testing applied to outdoor enclosures and meet or exceed state specifications. The wide range of options we can provide will allow for maximum utilization of your space.

Component Options

- » Breakers

Typical Applications

- » Residential

Call us and see for yourself how Tesco Controls can make a difference on your next project.



Tesco Controls, Inc.
8440 Florin Road
Sacramento, CA 95828
(916) 395-8800
www.TescoControls.com

Regional Offices

42015 Remington Ave. Suite 102
Temecula, CA 92590
(951) 308-6450


1315-B Dayton St.
Salinas, CA 93901
(831) 754-6838

213 Sage St.
Carson City, NV 89706
(800) 94-TESCO

10699 Airline Hwy. Suite B
Baton Rouge, LA 70816
(800) 94-TESCO

Specifications

- » Main breakers shall be 2 or 3 pole
- » May be rated up to 480 volt
- » Single or three phase
- » May be rated at 400 amp, 600 amp or 800 amp
- » Continuous welded seams
- » Fully framed side hinged outer door for flush fit with top drip lip & closed cell neoprene flange compressed gaskets
- » Separate pull section
- » Service enclosure interior is fabricated from cold rolled steel & powder coated white
- » Full length deadfront with stainless steel hinge and ¼ turn latch & knurled knobs
- » Deadfront hinged on same side as the front door and opens up to 120 degrees
- » Completely prewired in the factory
- » Wiring will be to NEMA IIB standards showing external connections & external equipment

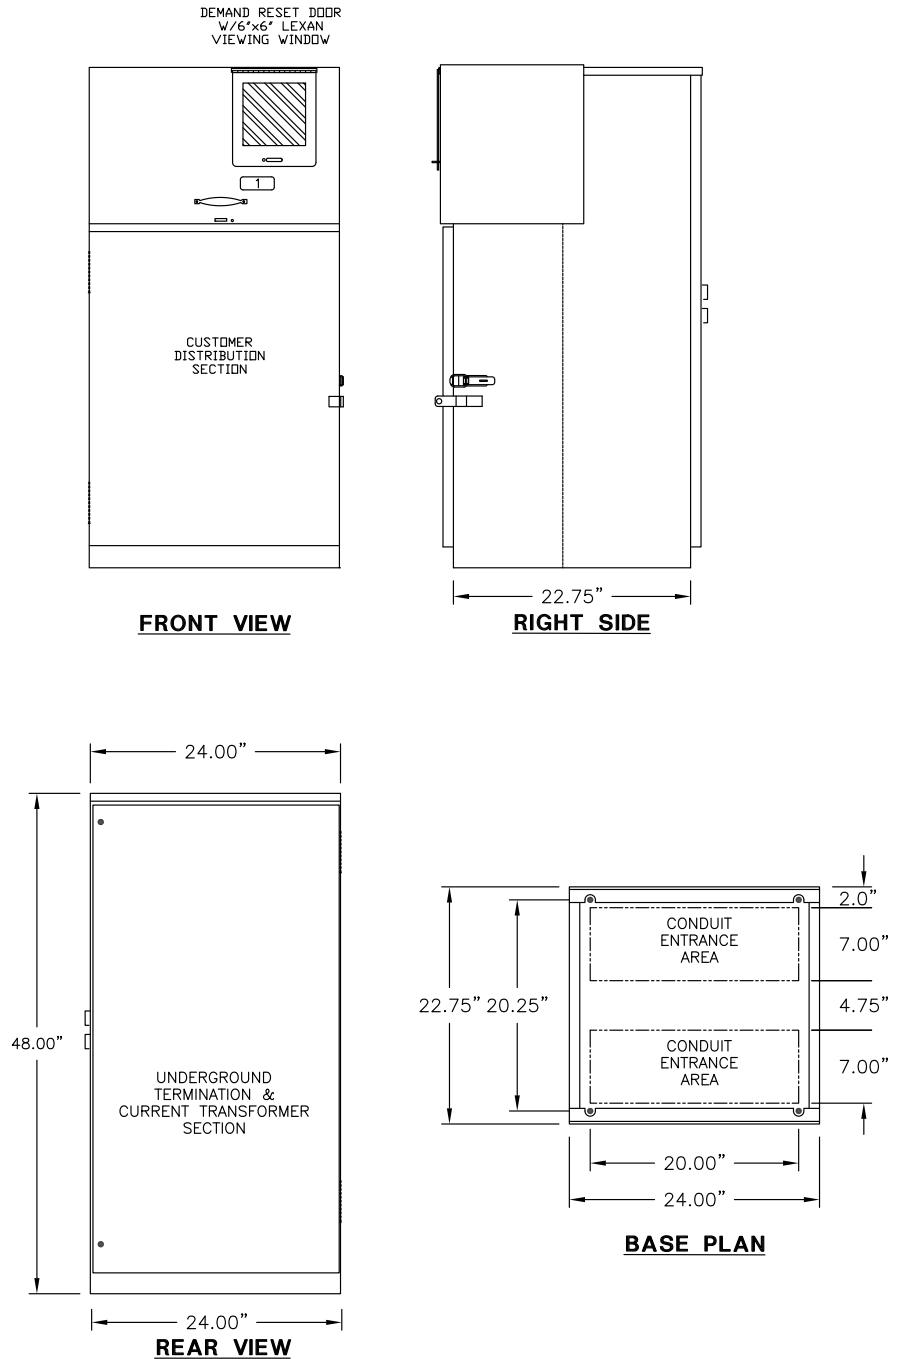

Custom options are available. Contact Tesco Controls, Inc. for more information:

916-395-8800 | sales@tescocontrols.com | www.tescocontrols.com | 8440 Florin Road, Sacramento, CA 95828



© 2016 Tesco Controls, Inc. | TESCO® and TESCOFLEX® are registered trademarks of Tesco Controls, Inc. | DN: B-28-600M_012116



TESCO
CONTROLS, INC.

100% Employee Owned